

■ Main Specifications


- 额定电流 (Current rating): 2.0A AC, DC
- 额定电压 (Voltage rating): 100V AC, DC
- 温度范围 (Temperature range): -25°C TO +85°C
- 接触电阻 (Contact resistance): ≤20MΩ
- 绝缘电阻 (Insulation resistance): ≥1000MΩ
- 耐电压 (Withstand voltage): 800V AC/minute

■ 产品编码简介: GJ-C2000WSD-**-PON

① ② ③ ④

1. 系列号;
2. 端到端接插针座;
3. Pin位数;
4. PBT UL94V-0 (本色)

a: 弹簧针

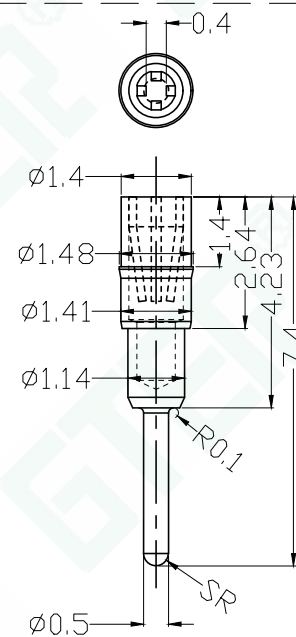

端子镀镍200u"

组成序号	名称	材质	Dimensions(mm)		Q'ty/ bag
			A	B	
a	0.5圆pin弹簧针	青铜镀高温亮锡	2.00	6.25	1,000
b	塑胶主体	PBT UL94V-0(本色)	4.00	8.25	1,000
			6.00	10.25	1,000
			8.00	12.25	1,000
			10.00	14.25	1,000

GTER® 东莞市高嘉精密电子有限公司
DONGGUAN GJ PRECISION ELECTRONICS Co.Ltd.

PART NO: GJ-C2000WSD-**-PON

2.00mm WIRE TO WIRE CONNECTOR, WAFER (S-DIP TYPE)

APPROVED BY: APPROVED

CHECKED BY: CHECKED

DRAWN BY: yiliangdong

DATE: 2021-11-25

C2000针座 产品图

PROJ:

UNIT: mm

SCALE: --

SHEET: 1/1 A4

VER NO: A0

TOLERANCE

-1 ±0.10

1-5 ±0.15

5-15 ±0.20

15-30 ±0.25

30- ±0.30

(ANGLE) .X ±10°

LTR

标记1

标记2

标记3

标记4

CUSTOMER: ---

REVISION RECORD

修改内容1

修改内容2

修改内容3

修改内容4

NAME

姓名1

姓名2

姓名3

姓名4

DATE

日期1

日期2

日期3

日期4

Conforms to The RoHS&REACH Instruction