


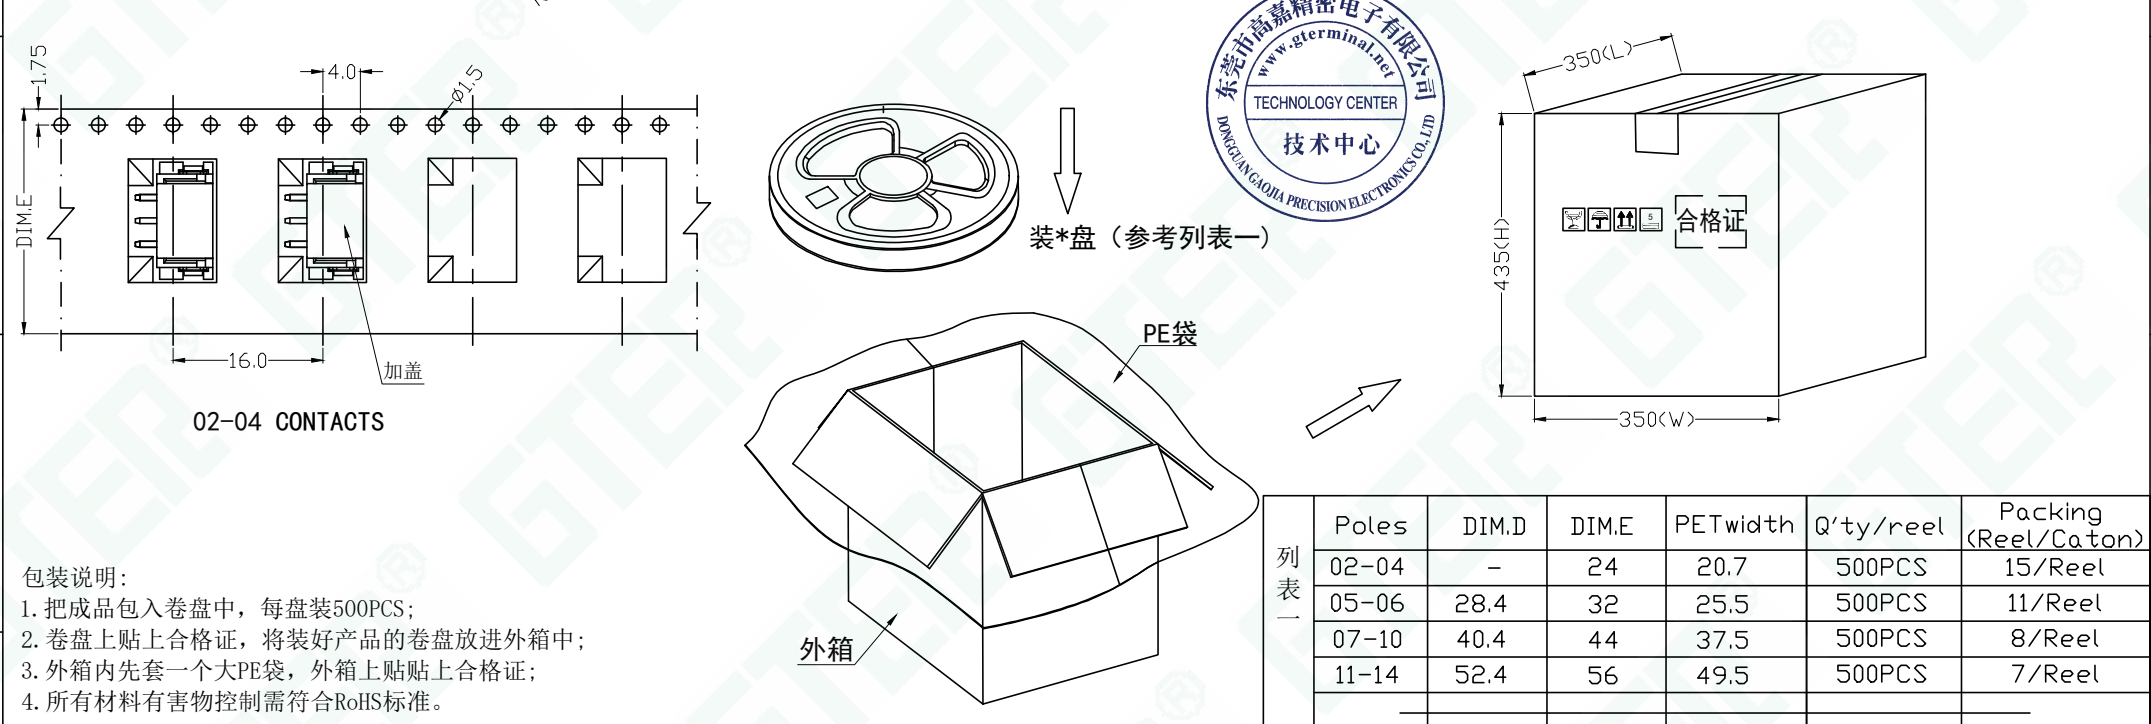
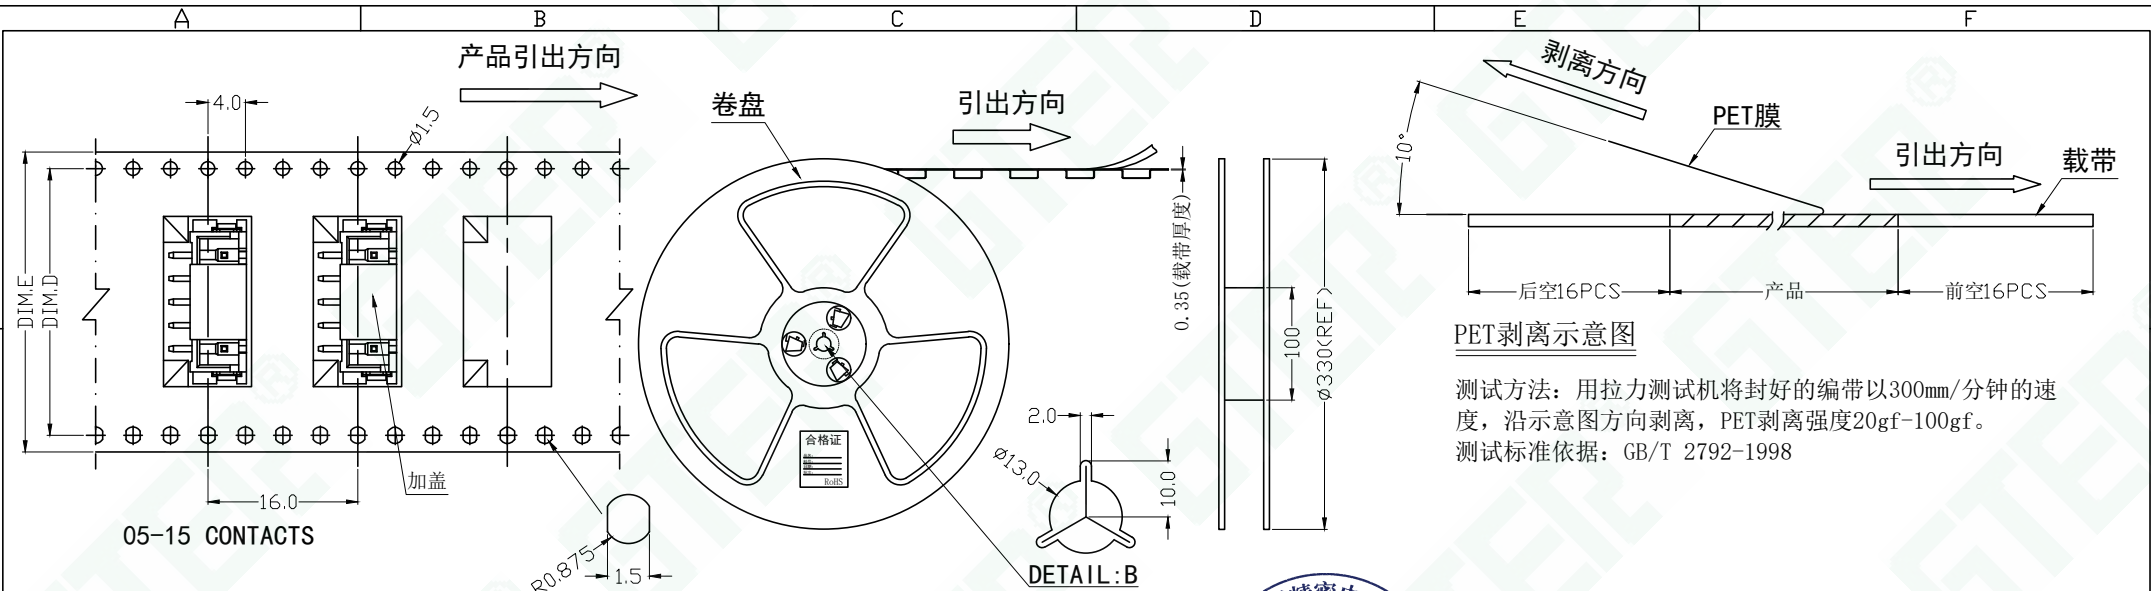
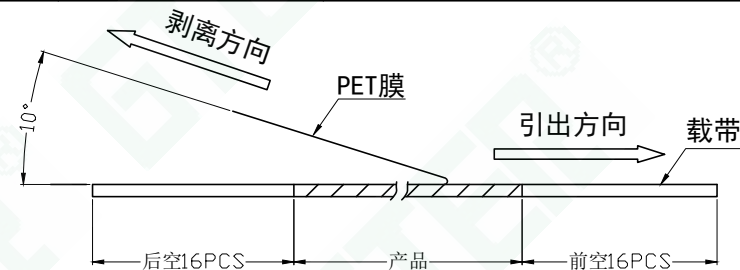
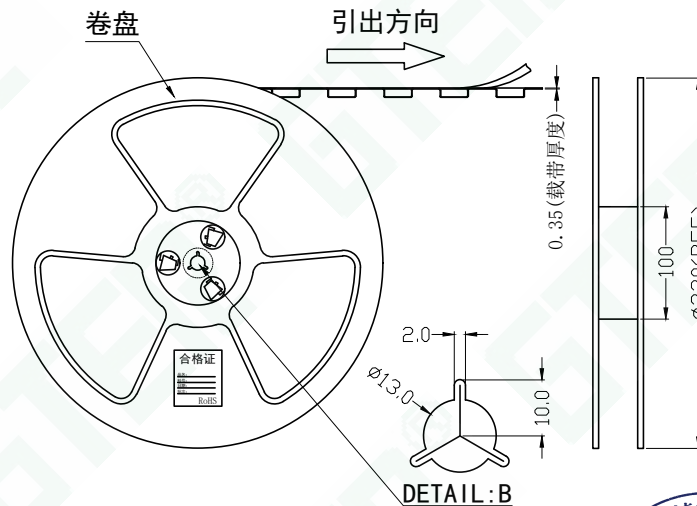
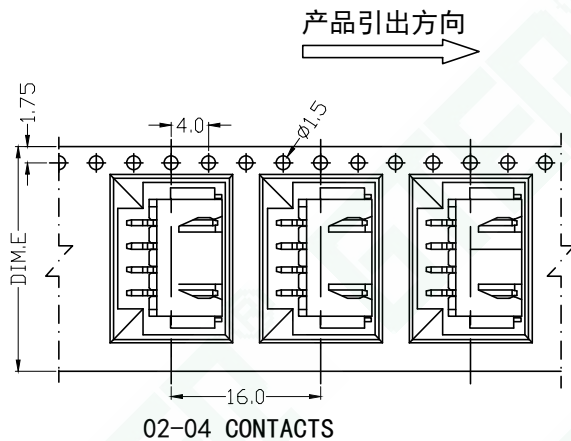


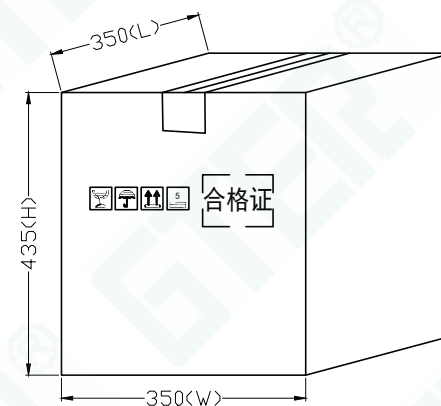

GTER® 东莞市高嘉精密电子有限公司 DONGGUAN GJ PRECISION ELECTRONICS Co.Ltd.	APPROVED BY: APPROVED		PROJ: 		TOLERANCE		LTR	REVSION RECORD		NAME	DATE
	CHECKED BY: CHECKED		UNIT: mm		-1 ±0.10		标记1	修改内容1		姓名1	日期1
	DRAWN BY: yiliangdong		SCALE: --		1-5 ±0.15		标记2	修改内容2		姓名2	日期2
	DATE: 2021-11-25		SHEET: 1/1		5-15 ±0.20		标记3	修改内容3		姓名3	日期3
	A4		15-30 ±0.25		30- ±0.30		标记4	修改内容4		姓名4	日期4
PART NO: GJ-A2501WVS-**-F0N		DATE: 2021-11-25		SHEET: 1/1		A4		15-30 ±0.25		15-30 ±0.25	
2.50mm WIRE TO BOARD CONNECTOR, WAFER(V-TYPE)		A2501立式贴板针座包装图		VER NO: AO		(ANGLE) .X ±10°		CUSTOMER: ---		Conforms to The RoHS&REACH Instruction	
A		B		C		D		E		F	



测试方法: 用拉力测试机将封好的编带以300mm/分钟的速度, 沿示意图方向剥离, PET剥离强度20gf-100gf。
测试标准依据: GB/T 2792-1998

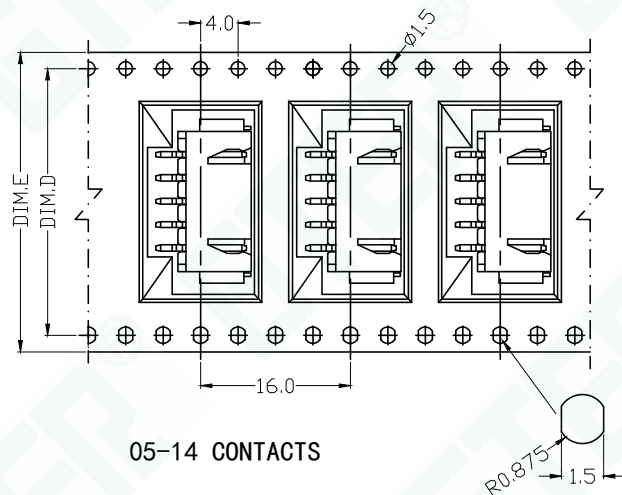

- 包装说明:
1. 把成品包入卷盘中, 每盘装700PCS;
 2. 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中;
 3. 外箱内先套一个大PE袋, 外箱上贴贴上合格证;
 4. 所有材料有害物控制需符合RoHS标准。

列表一	Poles	DIM.D	DIM.E	PETwidth	Q'ty/reel	Packing (Reel/Caton)
	02-04	-	24	20.7	700PCS	15/Reel
	05-06	28.4	32	25.5	700PCS	11/Reel
	07-10	40.4	44	37.5	700PCS	8/Reel
	11-14	52.4	56	49.5	700PCS	7/Reel

GTER® 东莞市高嘉精密电子有限公司
DONGGUAN GJ PRECISION ELECTRONICS Co.Ltd.

PART NO:GJ-A2501WRS-**-F0N

2.50mm WIRE TO BOARD CONNECTOR, WAFER (R-TYPE)

APPROVED BY: APPROVED

CHECKED BY: CHECKED

DRAWN BY: yiliangdong

DATE: 2021-11-25

A2501卧式贴板针座包装图

PROJ:

UNIT: mm

SCALE: --

SHEET: 1/1 A4

VER NO: AO

TOLERANCE

-1 ±0.10

1-5 ±0.15

5-15 ±0.20

15-30 ±0.25

30- ±0.30

(ANGLE) .X ±10°

LTR

标记1

标记2

标记3

标记4

REVISION RECORD

修改内容1

修改内容2

修改内容3

修改内容4

NAME

姓名1

姓名2

姓名3

姓名4

DATE

日期1

日期2

日期3

日期4

CUSTOMER: ---

Conforms to The RoHS&REACH Instruction